



TOWING TRAILERING & VEHICLE ACCESSORIES



CARGO RATCHET STRAPS

TABLE OF CONTENTS

		TABLE OF CONTENT	3
HITCH BALLS			P1-2
STANDARD HITCH BALLS	1	HIGH RISE HITCH BALLS	2
STAINLESS STELL HITCH BALLS	1	PINTLE REPLACEMENT BALLS	2
BALL MOUNTS			P3-10
CLASS I/II BALL MOUNTS	3	CLEVIS BALL MOUNTS	7
CLASS III/IV BALL MOUNTS	4	ADJUSTABLE TRI-BALL MOUNTS	7
CLASS V BALL MOUNTS	4	ATV BALL MOUNT	8
SOLID FORGED BALL MOUNTS	4	MULTI-USE BALL MOUNTS	9
ADJUSTABLE BALL MOUNTS	5	DUAL RECEIVER EXTENDERS	9
STARTER KITS	5	TOW HOOK AND STRAP BALL MOUNTS	9
DUALBALL /TRIBALL MOUNTS	6	EXTENDER AND RECEIVER ADAPTER	10
REVERSIBLE BALL MOUNTS	7		
HITCH LOCKS & PINS			P11
HITCH PINS AND CLIPS			11
TRAILER LOCKS			11
TOWING ACCESSORY			P12-13
BALL COVER	12	BEARING KITS	13
REDUCER BUSHING	12	BEARING PROTECTOR	13
HITCH COVER	12	WHEEL CHOCK	13
HEX WRENCH	12	ANTI-RATTLE HITCH CLAMP	13
QUICK LINKS	12		-
SHOOKS	12		
PINTLE HOOK & ACCESSORIES			P14~15
PINTLE MOUNTS	14	PINTLE HOOKS	15
TOW EYELET	14	PINTLE RECEIVER	15
FORGED LUNETTE EYES	14		
TRAILERING ACCESSORIES			P16~18
STRAIGHT CHANNEL COUPLER	16	SCISSORS JACKS	17
A-FRAME COUPLER	16	JACK ACCESSORIES	17
ADJUSTABLE COUPLER & BRACKETS	16	MARINE JACKS	18
HAND WINCHES	17	SWIVEL JACKS	18
CARGO MANAGEMENT			P19~20
CAM BUCKLES	19	LOGISTIC RATCHET STRAPS	23
OVERCENTER BUCKLES	19	WELD-ON WEBBING WINCH	23
RATCHET BUCKLES	20	BIKE RACK	24
WINCH STRAPS	21	CARGO RACK	25

Towing & Trailering




HITCH BALLS

• Solid steel hitch balls engineered to meet all satety

requirements of VESC regulation V-5

- Cold forged for superior strength
- When installing hitch balls, Torgue all 3/4" shank dia.(B) to 160 ft.lbs.,
 - 1" shank dia.(B) balls to 250 ft.lbs., and 1 1-/4" shank dia.(B) balls to 450 ft.lbs.

STANDARD HITCH BALLS



P/N	A:Ball Diameter	B:Shank Diamater	C:Shank Length	GTW	Finish	
84096	1-7/8"	3/4"	1-1/2"	2,000 lbs	Chrome	
84107	1-7/8"	3/4"	2 1/8"	2,000 lbs	Chrome	II
84111	1-7/8"	3/4"	3"	2,000 lbs	Chrome	84107
84113	1-7/8"	1"	2 1/8"	3,500 lbs	Chrome	
84114	1-7/8"	1"	2-1/2"	3,500 lbs	Chrome	
84115	1-7/8"	1"	3"	3,500 lbs	Chrome	
84099	2"	3/4"	1-1/2"	3,500 lbs	Chrome	
84117	2"	3/4"	2 1/8"	3,500 lbs	Chrome	
84102	2"	3/4"	3"	3,500 lbs	Chrome	84102
84121	2"	1"	2 1/8"	5,000 lbs	Chrome	
84124	2"	1"	2-1/2"	5,000 lbs	Chrome	
84125	2"	1"	3"	5,000 lbs	Chrome	
84105	2-5/16"	1"	2 1/8"	10,000 lbs	Chrome	
84130	2-5/16"	1"	3"	10,000 lbs	Chrome	
84131	2-5/16"	1-1/4"	2-5/8"	10,000 lbs	Chrome	84131
84132	2-5/16"	1-1/4"	3"	10,000 lbs	Chrome	

SATAINLESS STEEL

HITCH BALLS

P/N	A:Ball Diameter	B:Shank Diamater	C:Shank Length	GTW	Finish
84137	1-7/8"	3/4"	2-1/8"	2,000 lbs.	SS
84138	2"	3/4"	2-1/8"	3,500 lbs.	SS
84139	1-7/8"	1"	2-1/8"	3,500 lbs.	SS
84140	2"	1"	2-1/8"	6,000 lbs.	SS
84141	2-5/16"	1"	2-1/8"	6,000 lbs.	SS





HIGH RISE HITCH BALLS

P/N	Ball Diameter	Shank Diamater	Shank Length	Rise	Capacity	Note
84081	1 78"	1"	2 3/16"	1"	3,500 lbs.	Chrome
84082	1 78"	1"	2 1/8"	2"	3,500 lbs.	Chrome
84083	2"	1"	2 1/8"	1"	6,000 lbs.	Chrome
84084	2"	1"	2 1/8"	2"	6,000 lbs.	Chrome
84085	2 5/16"	1 1/4"	2-5/8"	1"	10,000 lbs.	Chrome
84086	2 5/16"	1 1/4"	2-5/8"	2"	10,000 lbs.	Chrome
84087	2 5/16"	1 1/4"	2-5/8"	1"	25,000 lbs.	Raw,machined finish
84088	2 5/16"	1 1/4"	2-5/8"	2"	25,000 lbs.	Raw,machined finish




PINTLE REPLACEMENT BALLS

P/N	A:Ball Diameter	B:Shank Diamater	C:Shank Length	GTW	Finish
84143	1 7/8"	1 1/4"	2 1/4"	6,000 lbs.	Chrome
84145	2"	1 1/4"	2 1/4"	10,000 lbs.	Chrome
84146	2 5/16"	1 1/4"	2 1/4"	12,000 lbs.	Chrome
84106	2 5/16"	1 1/4"	2 -3/8"	14,000 lbs.	Chrome



HITCH BALL PACKAGING STYLE

Custom Package Per Requirements

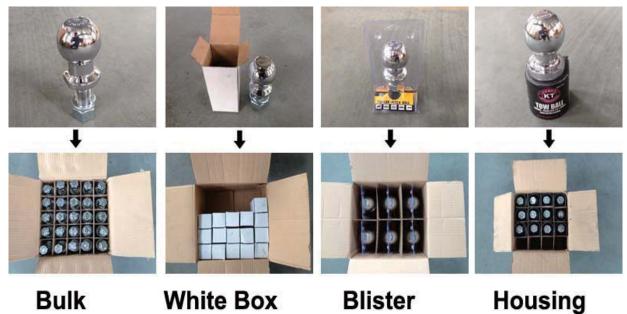



CLASS I/II BALL MOUNTS

- Fits 114/" square receiver tube opening
- Includes pin and clip
- Black powder coat finish

We offer ball mounts and drawbars in three separate styles: straight cut, angle cut and drop cut.

Refer to the styles below to select the mount that best suits your needs.







CLASS I/II BALLMOUNTS

P/N	Drop(C)	Rise (B)	Length (A)	GTW/TW	Hole	Style	
84150	1 1/4"	5/8"	6 3/4"	2,000/200 lbs.	3/4"	STYLE 1	
84149	1 1/4"	5/8"	9 3/4"	2,000/200 lbs.	3/4"	STYLE 1	1
84153	1 1/4"	3/4""	6 3/4"	3,500/350 lbs.	3/4"	STYLE 1	9010
84155	1 1/4"	3/4"	9 3/4"	3,500/350 lbs.	3/4"	STYLE 1	**
84249	3 1/4"	2 5/8"	6 1/4"	2,000/200 lbs.	3/4"	STYLE 3	
84220	3 1/4"	2 5/8"	7 1/4"	2,000/200 lbs.	3/4"	STYLE 3	84153
84250	3 1/4"	2 5/8"	9 3/8"	2,000/200 lbs.	3/4"	STYLE 3	
84222	5 1/4"	4 5/8"	5 9/16"	2,000/200 lbs.	3/4"	STYLE 3	
84252	2 3/4"	2 1/4"	7 1/2"	3,500/350 lbs.	3/4"	STYLE 3	
84232	3 1/4"	2 3/4"	6 1/4"	3,500/350 lbs.	3/4"	STYLE 3	
84224	3 1/4"	2 3/4"	7 1/4"	3,500/350 lbs.	3/4"	STYLE 3	
84225	3 1/4"	2 3/4"	9 3/8"	3,500/350 lbs.	3/4"	STYLE 3	84232
84218		3"	9 1/2"	2,000/200 lbs.	3/4"	STYLE 2	
84221		3 3/4"	11 1/2"	2,000/200 lbs.	3/4"	STYLE 2	
84219		5"	9 9/16"	2,000/200 lbs.	3/4"	STYLE 2	
84234		5"	11 9/16"	2,000/200 lbs.	3/4"	STYLE 2	
84157		3 1/8"	9 3/4"	3,500/350 lbs.	3/4"	STYLE 2	
84158		3 1/8"	11 1/4"	3,500/350 lbs.	3/4"	STYLE 2	20
84159		5"	9 5/8"	3,500/350 lbs.	3/4"	STYLE 2	84219
84254		5"	11 5/8"	3,500/350 lbs.	3/4"	STYLE 2	04219
-			-		-		





CLASS III/IV BALL MOUNTS

Rise

3/4"

3/4"

2"

2"

2 3/4"

2 3/4"

4 3/4"

4 3/4"

6 3/4"

6 3/4"

Length

8 1/2"

10 1/4"

8 1/2"

10 1/4"

9"

11"

9 1/4"

12 1/4"

9 1/8"

13"

GTW / TW

6,000/600 lbs.

6,000/600 lbs.

5,000/500 lbs.

5,000/500 lbs.

5,000/500 lbs.

5.000/500 lbs.

5,000/500 lbs.

5.000/500 lbs.

5,000/500 lbs.

5,000/500 lbs.

- Fits 2 " square receiver tube opening
- Includes pin and clip

P/N

84161

84257

84235

84236

84263

84264

84265

84266

84166

84268

Black powder coat finish

Drop

2"

2"

3 1/4"

3 1/4"

4"


4"

6"

6"

8"

8"



Finish

Black



84263



For trailer hitchs with a 2"x2" & 2 1/2"X2 1/2" receiver tube opening
Permanently attached trailer, balls cannot be lossened and stolen

Ball Hole

1"

1"

1"

1"

1"

1"

1"

1"

1"

1"









P/N	Shank	Drop	Rise	Length	GTW/TW	Ball Hole	Finish
84270	2" tube	6"	4 3/4"	9 3/8"	10,000/1,000 lbs.	1 1/4"	Black
84229	2"tube	8"	6 3/4"	9 3/8"	10,000/1,000 lbs.	1 1/4"	Black
84271	2" solid	6"	5"	9 3/8"	12,000/1,200 lbs.	1 1/4"	Zinc
84272	2" solid	8"	7"	9 3/8"	12,000/1,200 lbs.	1 1/4"	Zinc
84273	2 1/2" tube	2"	1/2"	8 3/4"	12,000/1,200 lbs.	1 1/4"	Black
84230	2 1/2" tube	4"	2 1/2"	9 3/4"	12,000/1,200 lbs.	1 1/4"	Black
84274	2 1/2" tube	6"	4 1/2"	10"	12,000/1,200 lbs.	1 1/4"	Black

SOLID FORGED BALLMOUNTS

•Solid one-piece forged construction

•Fits 2" square receiver tube opening

P/N	Drop	Rise	Length	GTW/TW	Ball Hole	Finish
84276	2"	1"	8 1/2"	16,000/2,400 lbs.	1 1/4"	Black
84277	4"	3"	9 1/4"	16,000/2,400 lbs.	1 1/4"	Black
84278	6"	5"	10 1/4"	16,000/2,400 lbs.	1 1/4"	Black





ADJUSTBALE BALL MOUNTS

• Adjustable ball mounts are perfect for those who tow multiple trailers of varying coupler heights.

• Fits 2" square receiver tube opening, shank can be used in rise or drop postion.









84190

P/N	Description	Length	Max.Rise	Max.Drop	GTW. / TW.
84178	ADJUSTABLE BALL MOUNT, INCLUDES PIN & CLIP	12"	6 1/4"	7 1/2"	5,000/500 lbs.
84179	ADJUSTABLE BALL MOUNT INCLUDES BOLTS	12"	6 1/4"	7 1/2"	5,000/500 lbs.
84189	ADJUSTABLE BALL MOUNT, INCLUDES PIN & CLIP	10 3/4"	8 "	10 "	6,000/600 lbs.
84190	ADJUSTABLE BALL MOUNT INCLUDES FASTENER KIT & 2" hitch ball	12"	8 3/8"	9 5/8"	5,000/500 lbs.

TOWING STARTER KITS

- Includes pin and clip
- Fits 2" square receiver tube opening
- Black powder coat finish

P/N	Drop	Rise	Length	GTW / TW	Ball
84245	2"	3/4"	8 1/4"	3,500/350 lbs.	1 7/8"
84169	2"	3/4"	8 1/4"	6,000/600 lbs.	2"
84246	3 1/4"	2"	8 1/4"	3,500/350 lbs.	1 7/8"
84247	3 1/4"	2"	8 1/4"	5,000/500 lbs.	2"
84248	4"	2 3/4"	8 1/4"	6,000/600 lbs.	2 5/16"
84231	4"	2 3/4"	8 1/4"	3,500/350 lbs.	1 7/8"
84170	4"	2 3/4"	8 1/4"	5,000/500 lbs.	2"



TRI BALL MOUNTS WITH HOOK

• For trailer hitchs with a 2"x2" receiver tube opening

•Permanently attached trailer, balls cannot be lossened and stolen





P/N	Shank	Longth			Ball Color		
F/IN SIId	Shark	Length	1 7/8"	2"	2 5/16"	Hook	
84180	Hollow	8 1/2"	2,000/200 lbs	6,000/600 lbs.	10,000/1000 lbs	1,0000 lbs.	Chrome
84181	Hollow	8 1/2"	2,000/200 lbs	6,000/600 lbs.	10,000/1000 lbs	1,0000 lbs.	Black
84277	Solid	8 1/2"	2,000/200 lbs	6,000/600 lbs.	10,000/1000 lbs	1,0000 lbs.	Chrome
84278	Solid	8 1/2"	2,000/200 lbs	6,000/600 lbs.	10,000/1000 lbs	1,0000 lbs.	Black



DUAL BALL MOUNTS

• For trailer hitchs with a 2"x2" receiver tube opening

•Permanently attached trailer balls cannot be lossened and stolen











P/N	Shank	Longth	Bal	Size & Max. GTW/T	W	Ball Color
P/IN	Shank	Length	1 7/8"	2"	2 5/16"	Ball Color
84188	Hollow	8 1/2"	2,000/200 lbs	6,000/600 lbs.		Black
84281	Hollow	8 1/2"		6,000/600 lbs.	10,000/1000 lbs.	Black
84282	Solid	8 1/2"	2,000/200 lbs	6,000/600 lbs.		Black
84283	Solid	8 1/2"		6,000/600 lbs.	10,000/1000 lbs.	Black
84284	Hollow	8 1/2"	2,000/200 lbs	6,000/600 lbs.		Chrome
84285	Hollow	8 1/2"		6,000/600 lbs.	10,000/1000 lbs.	Chrome
84286	Solid	8 1/2"	2,000/200 lbs	6,000/600 lbs.		Chrome
84287	Solid	8 1/2"		6,000/600 lbs.	10,000/1000 lbs.	Chrome



• For trailer hitchs with a 2"x2" receiver tube opening

•Permanently attached trailer balls cannot be lossened and stolen









P/N	Shank	Length	Bal	Ball Color		
	Shahk	Lengui	1 7/8"	2"	2 5/16"	
84172	Hollow	8 1/2"	2,000/200 lbs	6,000/600 lbs.	10,000/1000 lbs.	Black
84173	Hollow	8 1/2"	2,000/200 lbs	6,000/600 lbs.	10,000/1000 lbs.	Chrome
84175	Solid	8 1/2"	2,000/200 lbs	6,000/600 lbs.	10,000/1000 lbs.	Black
84176	Solid	8 1/2"	2,000/200 lbs	6,000/600 lbs.	10,000/1000 lbs.	Chrome

Towing and Trailering

CLEVIS-PIN MOUNT

• For trailer hitches with a 2" x2" receiver tube opening

84211

Length

8 3/4"

8 3/4"

8 3/4"

8 3/4"

- •Can be used as standard mount
- Black powder coat finish

P/N

84211

84177

84212

84213



Hole

1"

1"

1"

1"

GTW. / TW.

6,000/600 lbs.

10,000/1000 lbs.

6,000/600 lbs.

10,000/1000 lbs.

CLEVIS-PIN DROP MOUNT

- For trailer hitches with a 2" x2" receiver tube opening
- •Can be used as standard mount as 1 1/4" drop
- Black powder coat finish



Part#	Length	GTW. / TW.	Hole
84212	8 3/4"	6,000/600 lbs.	1"
84213	8 3/4"	10,000/1000 lbs.	1"



- Strong, welded trailer balls,
- Includes three 5/8" diameter pins & clips

Shank

Hollow

Solid

Hollow

Solid

Durable powder coat finish



84193

P/N Description		Length	Max.Rise Max.Drop		GTW. / TW.	
84193	ADJUSTABLE TRI-BALL MOUNT	12"	5 3/4"	5 3/4"	6,000/7,500/10,000 lbs.	



REVERSIBLE

BALL MOUNTS

- Includes pin and clip
- Fits 2" square receiver tube opening

Black powder coat finish

P/N	Dren	Piece	Longth	Ball Size & Max. GTW/TW			Ball Size & Max. GTW/TW		
	Drop	Rise	Length	1 7/8"	2" 2 5/16"	Ball Color			
84279	3 1/4" (1/7/8" ball)	2" (2" ball)	8 1/2"	3,500/350 lbs	6,000/600 lbs.		Black		
84280	3 1/4" (2" ball)	2" (2 5/16" ball)	8 1/2"		6,000/600 lbs.	7,500/750 lbs.	Black		



ATV HITCH

- Unique adapter provides a 2" x 2" trailer hitch receiver for your ATV
- Simple installation bolts onto any size ATV tongue (Hardware included)
- Integrated D-ring provides a convenient tie-down point
- Black powder coat finish

P/N	Description
84214	Bolt on ATV Adapter with welded D ring, 2000 lbs



Bolt this adapter onto any size ATV tongue to create a 2" x 2" receiver tube for towing or attaching ATV accessories.

Integrated D-ring provides a convenient tie-down point.

ATB BALL MOUNT

P/N	P/N Description		Description
84215	3/4" Clevis & Hitch Ball Holes, fits 2" Receiver	84216	3-way hitch: Ball, Clevis & Hook, 3/4" ball hole, 5/8" clevis hole



3-IN-1 ATV BALLMOUNT

- For ATVs equipped with 2" x2" receiver tube opening
- DO NOT exceed the ATV's MAX. tow rating
- Black powder coat finish

Part#	Length	GTW. / TW.	Hole	Ball
84208	8 3/4"	6,000/600 lbs.	1"	1 7/8"
84209	8 3/4"	10,000/1000 lbs.	1"	2"







MULTI-USE BALL MOUNT

• Ideal for carrying a bike rack while towing with a trailer

• Top receiver not for towing use

P/N	Drop	Rise	Length	GTW.TW	HOLE SIZE
84192	2 1/4"	3/4"	11 1/2"	7,500/750 lbs.	1"



84192

DUAL RECEIVER EXTENDER

- Providew two receiver tubes for multiple accessories, such as cargo carriers and bike racks.
- Top receiver not for towing use





P/N	Rise	Length	GTW.TW	Finish	Receiver
84182	7"	10"	3,500/350 lbs.	1"	2"
84191	7"	10"	6,000/600 lbs.	1"	2"

TOW HOOK & STRAP MOUNTS

- For trailer hitches with a 2"x2" receiver tube opening
- GWT and TW are limited to trailer hitch c
- Durable powder coat finish



84431



84535

84530

Part#	Length	Finish	Description
84431	5"	Black	Use with tow straps and hooks, complete with shackle and solid shank
84535	7 1/2"	Black	Use with vehicle recovery strap or similar
84530	n/a	Black	bolt-on tow hook with keeper, 10,000 lbs
84195	10"	Black	Forged hook, use with vehicle recovery strap or similar




RECEIVER EXTENDERS

•Extends receier tube, providing additional clearance





P/N	Description	GTW.TW
84416	Receiver Extenders,7.7" length	3,500/350 lbs.
84417	Receiver Extenders,9" length,	3,500/350 lbs.
84418	Receiver Extenders,12" length	3,500/350 lbs.
84419	Receiver Extenders,18" length	3,500/350 lbs.



Measruing extenders and adapters

RECEIVER ADAPTERS

•Adapts receiver tube opening to a differents size

•Durable powder coat finish

P/N	Size from	to	Length	GTW. / TW.	Finish
84409	1 1/4"	2"	6 1/2"	3,500/350 lbs.	Black
84410	1 1/4"	2"	10"	3,500/350 lbs.	Black
84411	2"	1 1/4"	7"	3,500/350 lbs.	Black
84412	2"	1 1/4"	9 1/2"	3,500/350 lbs.	Black





REDUCER SLEEVE

•Reduces a 2 1/2" x 2 1/2" receiver tube opening to a 2" x 2" opening

P/N	Length From		То	Finish
84415	5 1/2"	2 1/2"	2	Black
84439	5 1/2"	2 1/2"	2	Zinc
84413	7"	2	1 1/4"	Black

0

84439

COMBO BAR

• Designed for use in fabricating undercar receiver hithes when a receiver is not available.

Made of cold formed structrual tubing

• Sized and punched to fit all common weight distributing hitch ball mounts or utility ball mounts.

P/N	Description	Finish
84420	Combo Bar 6" with 1-1/4" Trailer Hitch Receiver	Raw
84421	Combo Bar 12" with 1-1/4" Trailer Hitch Receiver	Raw
84422	Combo Bar 24" with 1-1/4" Trailer Hitch Receiver	Raw
84423	Combo Bar 6" with 2" Trailer Hitch Receiver	Raw
84425	Combo Bar 12" with 2" Trailer Hitch Receiver	Raw
84427	Combo Bar 24" with 2" Trailer Hitch Receiver	Raw
84428	Combo Bar 36" with 2" Trailer Hitch Receiver	Raw
84429	Combo Bar 48" with 2" Trailer Hitch Receiver	Raw
84430	Combo Bar 10" with 2-1/2" Trailer Hitch Receiver	Raw





Towing and Trailering

HITCH PINS & CLIPS

•For securing ball mounts and accessories to trailer hitches

•Bent handle for easy operation



P/N	Fits Receiver Tube Opening	Pin Diameter	Style	Length	Finish	Descritopn
84380	1 1/4" x 1 1/4"	1/2"	Hole	2"	Zinc	Hitch pin & clip.
84385	1 1/4" x 1 1/4"	1/2"	Groove	2 "	Zinc	Hitch pin & clip, grooved
84400	1 1/4" x 1 1/4"	1/2"	Groove	2"	Zinc	Hitch pin & clip, grooved coated hande
84378	2" x 2"	1/2"	Groove	3 "	Zinc	Hitch pin & clip, grooved
84381	2" x 2"	5/8"	Hole	3 "	Zinc	Hitch pin & clip
84382	2" x 2"	5/8"	Hole	3 1/2 "	Zinc	Hitch pin & clip
84383	2 1/2" x 2 1/2"	5/8"	Hole	4 "	Zinc	Hitch pin & clip
84386	2" x 2"	5/8"	Groove	3 "	Zinc	Hitch pin & clip, grooved
84387	2" x 2"	5/8"	Groove	3 1/2 "	Zinc	Hitch pin & clip, grooved
84388	2 1/2" x 2 1/2"	5/8"	Groove	4 "	Zinc	Hitch pin & clip, grooved extra long
84401	2" x 2"	5/8"	Groove	3 "	Zinc	Hitch pin & clip, grooved coated handle
84533	1 1/4" x 1 1/4"	1/2"	Hole	2"	Yellow Zinc	Hitch pin & clip.

TRAILER LOCKS

•Water-tight dust cap prevents corrosion

Two keys included

P/N	Finish	Descritopn				
84360	Chrome	1/2" Dead bolt receiver hitch lock				
84361	Chrome	5/8" Dead bolt receiver hitch lock				
84363	Yellow	Coupler hitch lock				
84370	Chrome	5/10 Dog bone receiver hitch lock				
84373	Chrome	Silent hitch pin				






Towing and Trailering

BALL • Protects trailer ball when not in use **COVER**



8454	1 8	84542			
P/N	Finsh	Ball			
84541	Black rubber	17/8" & 2"			
84542	84542 Black rubber				

REDUCER **BUSHINGS**





84551 84552



84553

P/N	From To		Finish
84551	1"	3/4"	Yellow zinc
84552	1 1/4"	1"	Yellow zinc
84553	1 3/8"	1 1/4"	Yellow zinc

HITCH **COVER**

P/N

84521

84522

84523

84525

• Friction-fit, pin& clip not required to hold in place

Description

1-1/4" Hitch Cover

2" Hitch Cover

1 1/4" Hitch Cover With Concave

2" Hitch Cover with Concave



TRAILER BALL HEX WRENCH

•Six-point desing assures the best grip and protets against roundingof the nut

Color

Black

Black

Black

Black

•Forged, hardened steel with durable, chorome plating

Material

Rubber

Rubber

Rubber

Rubber

P/N Descritption 84540 1 1/8" and 1 1/2" ends for use with 3/4"and 1" shanks

QUICK LINKS

 Provide quick connections of chain,cable or rope

 Threaded link and No tools needed



P/N Diameter Max Load Finish 84561 1/4" 220 lbs. Zinc 84562 5/16" 440 lbs. Zinc 84563 3/8" 660 lbs. Zinc 84564 1/2" 1100 lbs. Zinc

S-HOOKS W/LATCH

• Each hook must meet or exceed the maximum GTW of the trailer



84540

84568

P/N	Diameter	GTW	Finish
84566	3/8"	2,000 lbs.	Zinc
84567	7/16"	5,000 lbs.	Zinc
84568	9/16"	5,000 lbs.	Zinc



BEARING KITS

•One kit per hub

• Protection from water and dirt damage to hubs

P/N	Size	Description
84571	3/4"	Wheel bearing kits, 3/4"
84572	1"	Wheel bearing kits, 1"
84573	1 1/4"	Wheel bearing kits, 1 1/4"
84574		Wheel bearing kits, 1 3/8" and 1 1/16"



84574

BEARING PROTECTORS

Protects wheel bearing from dirt and waterLong lasting and easy to install

P/N	Hub Bore Size	Description
84575	1.78"	Includes two dust covers per package
84576	1.98"	Includes two dust covers per package
84577	2.32"	Includes two dust covers per package
84578	2.44"	Includes two dust covers per package



WHEEL CHOCK SET

•Always use vehicle brake

Not for commercial use

P/N	Descritption
84550	For use with wheels up to 17" wide



ANTI-RATTLE HITCH CLAMP

•Easy to install without removing the hitch

•Designed for use with most hitch mounted bike racks and cargo cariers

P/N	Finish	Descritopn
84582	Zinc	Anti-Rattle hitch clamp for 1 1/2" hitch
84583	Zinc	Anti-Rattle hitch clamp for 2 " hitch
84701	Zinc	Anti-Rattle hitch tightener for 1 1/2" hitch
84702	Zinc	Anti-Rattle hitch tightener for 2" hitch



84582



ADJUSTABALE PINTLE MOUNTS

• Converts receivers for use with pintle-type trailers,quickly and easily

• Provides mounting for both ball and pintle and rigid type pintle hooks





84203



84199

042			04201						
P/N	GTW	Shank	Hole Sets	Max Drop	Max Rise	Length	Plate Height	Finish	Description
84203	20,000 lbs.	2"	1	3"		8 1/2"	3 1/2"	Black	Pintle mount with 2" solid steel shank
84205	20,000 lbs.	2"	1	3"		10 1/2"	3 1/2"	Black	Pintle mount with 2" solid steel shank
84201	15,000 lbs.	2"	3	6 1/2"	1/2"	8 1/2"	7"	Black	Pintle mount with 2" solid steel shank
84202	15,000 lbs.	2"	3	6 1/2"	1/2"	10 1/2"	7"	Black	Pintle mount with 2" solid steel shank
84199	10,000 lbs.	2"	6	11 12/"	6"	12 1/2"	13"	Black	Pintle mount with 2" solid steel shank
84200	10,000 lbs.	2"	6	11 12/"	6"	14 1/2"	13"	Black	Pintle mount with 2" solid steel shank
84206	20,000 lbs.	2 1/2"	1	3"		8 1/2"	3 1/2"	Black	Pintle mount with 2 1/2" solid steel shank
84207	18,000 lbs.	2 1/2"	3	6 1/2"	1/2"	8 1/2"	7"	Black	Pintle mount with 2 1/2" solid steel shank

Description

Forged tow eyelet

84202

RECEIVER MOUNT TOW EYELET

Length

7 3/8"

FORGED LUNETTE EYES

• Commonly used on trilers up to 24,000 lbs. GTW

• Various adjustment heights for leveling the trailer

Eyehole

3" inside

Pintle

GTW

10.000 lbs.

CHANNELS &

P/N

84196

- Forged steel for high strength
- For 2"x2" receiver hitch

Finish

Black



84196

84198



P/N	GTW	Number of Positions	Eyehole Size	Channel Width	Channel Height	Description
84198	12,000 lbs.		3" inside			Forged lunette eye
84197	12,000 lbs.	3-postion	3" inside	3 1/2"	7 1/2"	Forged lunette eye with channel
84184	12,000 lbs.	5-postion	3" inside	3 1/2"	10 3/4"	Forged lunette eye with channel

Towing and Trailering

FORGED PINTLE HOOKS

- Forged steel for high strength
- Safety pin and bolt kit included

P/N	Pintle GTW	Vertical Load	Fits Lunette Eye	Finish	Description
84289	10,000 lbs.	2,000 lbs.	2 1/2" or 3"	Black	Forged pintle hook
84290	20,000 lbs.	4,000 lbs.	2 1/2" or 3"	Black	Forged pintle hook
84291	30,000 lbs.	8,000 lbs.	2 1/2" or 3"	Black	Forged pintle hook
84292	40,000 lbs.	12,000 lbs.	2 1/2" or 3"	Black	Forged pintle hook



FORGED BALL PINTLE COMBINATION

- Changeable ball with a hard, chrome surface
- Safety pin and bolt kit included
- Fits 2 1/2" or 3" lunette eye

P/N	Pintle GTW	Ball GTW	Ball Diameter	Finish	Description
84183	16,000 lbs.	6,000 lbs.	1 7/8″	Black	Forged ball and pintle combination
84184	16,000 lbs.	10,000 lbs.	2″	Black	Forged ball and pintle combination
84185	16,000 lbs.	12,000 lbs.	2 5/16"	Black	Forged ball and pintle combination



84184

FORGED RECEIVER **PINTLE HOOKS**

- Forged steel for high strength
- Fits 2" square receiver tube opening
- Fits 2 1/2" lunette eye





FORGED RECEIVER PINTLE COMBO BALL

- Forged steel for high strength
- Fits 2" square receiver tube opening
- Fits 2 1/2" or 3" lunette eye

P/N	Pintle GTW	Vertical Load	Ball Capacity	Finish	Description
84186	16,000 lbs.	2,400 lbs.	10,000 lbs.	Black	2" Receiver mount pintle combination
84187	16,000 lbs.	2,400 lbs.	12,000 lbs.	Black	2 5/16" Receiver mount pintle combination



Towing and Trailering

STRAIGHT CHANNEL • Durable zinc finish **COUPLER** Lockable latch

P/N	Class	GTW/TW	Ball Diam.	Channel Width
84340	I	2,000/200 lbs.	1-7/8"	2"
84341	I	2,000/200 lbs.	1-7/8"	2-1/2"
84342	I	2,000/200 lbs.	1-7/8"	3"
84343	II	3,500/350 lbs.	2"	2"
84345	П	3,500/350 lbs.	2"	2-1/2"
84346	II	3,500/350 lbs.	2"	3"
84347	Ш	5,000/500 lbs.	2"	3"

A-FRAME • Lockable latch **COUPLER** •Durable zinc or coating finish

P/N	Class	GTW/TW	Ball Diam.	Finish
84351	Ш	5,000 lbs.	2"	Zinc
84352	ш	5,000 lbs.	2"	Black
84353	IV	7,000 lbs.	2"	Black
84354	IV	12,000 lbs.	2 5/16"	Black
84355	IV	10,000 lbs.	2 5/16"	Black
84356	IV	14,000 lbs.	2 5/16"	Black

ADJUSTABLE COUPLER & BRACKETS

P/N	Class	GTW/TW	Ball Diam.	Finish
84361	IV	15,000 lbs.	2 5/16"	Black
84362	Ш	7,000 lbs.	2"	Black
84363	IV	12,500 lbs.	2 5/16"	Black
84364	IV	12,000 lbs.	2 "	Black
84365	IV	10,000 lbs.	2 5/16"	Black

P/N	Class	GTW/TW	Holes	Wide
84366	IV	13,000 lbs.	8	3"
84367	IV	15,000 lbs.	12	3"







84345





84361



HAND WINCHES

P/N	Capacity	Gear Ratio	Ratchet	Handle Length	Finish
84371	600 lbs.	3.1:1	one way/neutral	6	zinc
84372	800 lbs.	3.1:1	two way/neutral	6	zinc
84373	1,000 lbs.	4.1:1	two way/neutral	7	zinc
84374	1,200 lbs.	4.1:1	two way/neutral	7	zinc
84375	1,400 lbs.	4.1:1	two way/neutral	7	zinc
84376	1,600 lbs.	4.1:1	two way/neutral	7	zinc
84377	1,800 lbs.	4.1:1	two way/neutral	7	zinc
84378	2,000 lbs.	4.1:1	two way/neutral	7	zinc
84379	2,500 lbs.	5.1:1 12.1:1	two way/neutral	10	zinc



84378

SCISSORS JACKS

P/N	Capacity	Min. H	Max. H	Travel	Finish
84380	5000 lbs.	4 5/8"	23 1/2"	24"	Black
84381	7500 lbs.	4 5/8"	23 1/2"	24"	Black



TRAILER JACK ACCESSORIES


P/N	Description	Capacity	Size	Finish
84390	Trailer Jack Foot Plate, Used for Jack with 2" dia inner tube	5000 lbs.	7-1/4"x3-3/4"	Zinc
84391	Replacement Removable 6inch Trailer Swirl Jack Caster Wheel With Pin	1,200 lbs.	6"	Zinc
84392	Round Pad Replacement Drop Leg w/Pin Kit for 2" trailer jack	5,000 lbs.	5-1/4"x12-1/4"	Zinc
84393	For Replacement, Solid Trailer Jacks Cranking Handle Topwind	n/a	n/a	Zinc





84391

84393







•Design for use with marine and utlity trailers

•Includes all necessary mounting hardware



P/N	Capacity	Wind	Travel	Bracke Height	Wheel Size	Finish	Note
84461	1000 lbs.	Side	10	13"	6"	Zinc	
84462	1200 lbs.	Side	10	13"	6"	Zinc	
84463	1500 lbs.	Side	10	12 1/2"	Dual 6"	Zinc	
84464	1500 lbs.	Side	10	12 1/2"	6"	Zinc	

SWIVEL JACKS

•Design for use with marine and utlity trailers





P/N	Capacity	Wind	Travel	Bracke Height	Handle Color	Finish	Style
84471	2000 lbs.	Тор	14"	8"	Black	Zinc	A Frame
84472	2000 lbs.	Side	14"	9"	Black	Black	Bracket mount
84473	2000 lbs.	Тор	10"	12 1/2"	Red Claw	Gray	Bracket mount
84474	2000 lbs.	Тор	10"	12 1/2"	Black	Zinc	Pipe Mount
84475	5000 lbs.	Side	15"	10 1/2"	n/a	Gray	Pipe Mount



CAM **BUCKLES**

• Cast zinc alloy

• High quality finish




84630



84631



84632

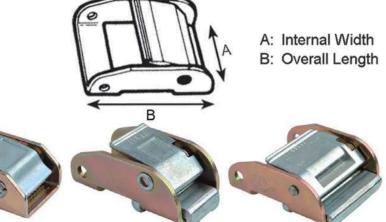

A: Internal Width B: Overall Length

C: Width of Handle

84	630		84631	84	4632	8463	84634
P/N	Size	Capacity	Internal Width-A	Overal Length-B	Finish	3 Description	
84630	1"	550 lbs.	26 mm	45 mm	Zinc	1in X 550 lbs. Cam Bu	ckle
84631	1"	880 lbs.	26 mm	50 mm	Zinc	1in X 880 lbs. Cam Bu	ckle
84632	1"	1,320 lbs.	28 mm	65 mm	Yellow Zinc	1in X 1320 lbs. Cam Bu	ckle
84633	1"	1,540 lbs.	28 mm	75 mm	Yellow Zinc	1in X 1540 lbs. Cam Bu	ckle
84634	2"	2,530 lbs.	54 mm	75 mm	Yellow Zinc	2in X 2530 lbs. Cam Bu	ckle










84640				84641		84645	84647	
P/N	Size	Capacity	Internal Width-A	Overal Length-B	Width of Handle-C	Finish	Strap Width	
84640	2"	1,800 lbs.	51 mm	183 mm	64 mm	Black	2in X 1800lbs Overcenter Buckle, Black	
84641	2"	1,800 lbs.	51 mm	183 mm	64 mm	SS	2in X 1800lbs Overcenter Buckle, Stainles	
84642	2"	1,760 lbs.	53 mm	170 mm	60 mm	SS	2in X 1760 lbs Overcenter Buckle, Stainless	
84643	2"	2,460 lbs.	53 mm	246mm	58 mm	SS	2in X 2640 lbs Overcenter Buckle, Stainless	
84644	2"	3,000 lbs.	53 mm	158 mm	59 mm	SS	2in X 3000 lbs Overcenter Buckle, Stainless	
84645	1 3/4"	5,000 lbs.	45 mm	140 mm	57 mm	Yellow Zinc	1 3/4in X5000 lbs Overcenter Buckle,	
84646	1 3/4"	5,000 lbs.	47 mm	165 mm	60 mm	Yellow Zinc	1 3/4in X5000 lbs Overcenter Buckle,	
84647	1 3/4"	5,000 lbs.	46 mm	165 mm	60 mm	Yellow Zinc	1 3/4in X5000 lbs Overcenter Buckle,	

Towing and Trailering

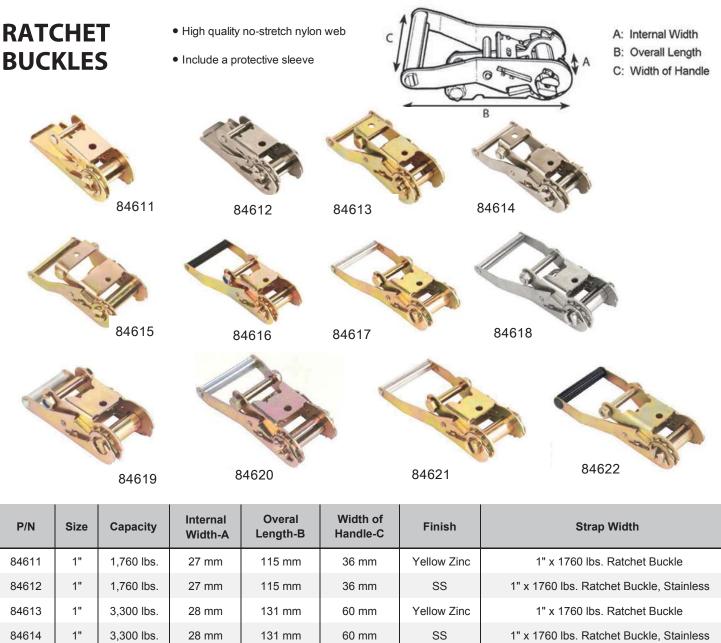

P/N	Size	Capacity	Internal Width-A	Overal Length-B	Width of Handle-C	Finish	Strap Width
84611	1"	1,760 lbs.	27 mm	115 mm	36 mm	Yellow Zinc	1" x 1760 lbs. Ratchet Buckle
84612	1"	1,760 lbs.	27 mm	115 mm	36 mm	SS	1" x 1760 lbs. Ratchet Buckle, Stainless
84613	1"	3,300 lbs.	28 mm	131 mm	60 mm	Yellow Zinc	1" x 1760 lbs. Ratchet Buckle
84614	1"	3,300 lbs.	28 mm	131 mm	60 mm	SS	1" x 1760 lbs. Ratchet Buckle, Stainless
84615	2"	4,400 lbs.	52 mm	133 mm	83 mm	Yellow Zinc	2"x 4400 lbs. Ratchet Buckle W/Steel
84616	2"	6,600 lbs.	52 mm	230 mm	100 mm	Yellow Zinc	2"X6600 lbs. Ratchet Buckle W/Plastic
84617	2"	6,600 lbs.	52 mm	230 mm	100 mm	Yellow Zinc	2"X6600 lbs. Ratchet Buckle W/Aluminium
84618	2"	6,600 lbs.	52 mm	230 mm	100 mm	SS	2"X6600 lbs. Ratchet Buckle W, Stainless
84619	2"	11,000 lbs.	52 mm	230 mm	100 mm	Yellow Zinc	2"X11000 lbs. Ratchet Buckle W/Aluminium
84620	2"	11,000 lbs.	52 mm	230 mm	100 mm	Yellow Zinc	2"X11000 lbs. Ratchet Buckle W, Stainless
84621	2"	11,000 lbs.	52 mm	230 mm	100 mm	Yellow Zinc	2"X11000 lbs. Ratchet Buckle W/Aluminium
84622	2"	11,000 lbs.	52 mm	230 mm	100 mm	Yellow Zinc	2"X11000 lbs. Ratchet Buckle W/Plastic
84623	3"	22,000 lbs.	52 mm	230 mm	100 mm	Yellow Zinc	3"X22000 lbs. Ratchet Buckle
84624	4"	24,200 lbs.	52 mm	230 mm	100 mm	Yellow Zinc	4"X24200 lbs. Ratchet Buckle
				-		-	

Towing and Trailering

84667

WINCH STRAPS

- High quality no-stretch nylon web
- Include a protective sleeve



84671

P/N	Break Strength	Strap Wide	Strap Length	Description	
84651	10,000 lbs.	2"	27 ft	2in Winch strap w/Delta Ring	
84652	10,000 lbs.	2"	30 ft	2in Winch strap w/Delta Ring	
84653	10,000 lbs.	2"	27 ft	2in Winch strap w/Flat Hook	
84654	10,000 lbs.	2"	30 ft	2in Winch strap w/Flat Hook	
84655	16,200 lbs.	3"	27 ft	3in Winch strap w/Delta Ring	
84656	16,200 lbs.	3"	30 ft	3in Winch strap w/Delta Ring	
84657	16,200 lbs.	3"	27 ft	3in Winch strap w/Chain Anchor	
84658	16,200 lbs.	3"	30 ft	3in Winch strap w/Chain Anchor	
84659	16,200 lbs.	3"	27 ft	3in Winch strap w/Flat Hook	
84660	16,200 lbs.	3"	30 ft	3in Winch strap w/Flat Hook	
84661	16,200 lbs.	3"	27 ft	3in Winch strap w/Wire Hook	
84662	16,200 lbs.	3"	30 ft	3in Winch strap w/Wire Hook	
84663	16,200 lbs.	4"	27 ft	4in Winch strap w/Delta Ring	
84664	16,200 lbs.	4"	30 ft	4in Winch strap w/Delta Ring	
84665	16,200 lbs.	4"	27 ft	4in Winch strap w/Flat Hook	
84666	16,200 lbs.	4"	30 ft	4in Winch strap w/Flat Hook	
84667	16,200 lbs.	4"	27 ft	4in Winch strap w/Wire Hook	
84668	16,200 lbs.	4"	30 ft	4in Winch strap w/Wire Hook	
84669	16,200 lbs.	4"	27 ft	4in Winch strap w/Chain Anchor	
84670	16,200 lbs.	4"	30 ft	4in Winch strap wChain Anchor	
84671	16,200 lbs.	4"	27 ft	4in Winch strap w/Grab Hook	
84672	16,200 lbs.	4"	30 ft	4in Winch strap w/Grab Hook	
84673	16,200 lbs.	4"	27 ft	4in Winch strap w/Sewn Loop	
84674	16,200 lbs.	4"	30 ft	4in Winch strap w/Sewn Loop	



CARGO • High Strength Polyester Material RATCHET STRAPS • Soft webbing will not scratch your cargo

S/N	Photo	Description	Break Strength	Strap Wide	Strap Length	Color
1	C	1in Cam Buckle Strap W/S Hook	1,200 lbs.	1"	6/9/12/15/20 ft	Yellow
2		1in Ratchet Strap W/S Hook	1,500 lbs.	1"	9/12/15/20 ft	Yellow
3	C	1in Ratchet Strap W/S Hook	3,000 lbs.	1"	9/12/15/20 ft	Black
4		1in Ratchet Strap W/Wire Hook & D Ring	3,000 lbs.	1"	16/20 ft	Black
5		2in Ratchet Strap W/Flat Hook	10,000 lbs.	2"	27/30 ft	Yellow
6		2in Ratchet Strap W/Wire Hook	10,000 lbs.	2"	27/30 ft	Yellow
7	Co-	2in Ratchet Strap W/Twisted Snap Hook	10,000 lbs.	2"	27/30 ft	Yellow
8	Coord Coord	2in Ratchet Strap W/Chain Anchor	10,000 lbs.	2"	27/30 ft	Yellow
9	C REAL	3in Ratchet Strap W/Flat Hook	16,200 lbs.	3"	27/30 ft	Yellow
10	CHERC	3in Ratchet Strap W/Wire Hook	16,200 lbs.	3"	27/30 ft	Yellow
11	Part -	3in Ratchet Strap W/Chain Anchor	16,200 lbs.	3"	27/30 ft	Yellow
12		4in Ratchet Strap W/Flat Hook	16,200 lbs.	4"	27/30 ft	Yellow
13		4in Ratchet Strap W/Wire Hook	16,200 lbs.	4"	27/30 ft	Yellow
14	Bash	4in Ratchet Strap W/Chain Anchor	16,200 lbs.	4"	27/30 ft	Yellow

Towing and Trailering

LOGISTIC RATCHET STRAPS • Soft webbing will not scratch your cargo

• High Strength Polyester Material

12FT STRAP 🛛 🔵 16FT STRAP 🔵 20FT STRAP

S/N	Photo	Description	Break Strength	Strap Wide	Strap Length	Color
1	A A	2in Logistic Cam Buckle Strap W/F 2- Piece Butterfly Fitting	1,500 lbs.	2"	12/16/20 ft	Y/G/B
2		2in Logistic Cam Buckle Strap W/F Plate Trailer Hook	2,200 lbs.	2"	12/16/20 ft	Y/G/B
3		2in Logistic Ratchet Strap W/F 2- Piece Butterfly Fitting	1,500 lbs.	2"	12/16/20 ft	Y/G/B
4		2in Logistic Ratchet Strap W/F Plate Trailer Hook	2,200 lbs.	2"	12/16/20 ft	Y/G/B
5		2in Logistic Cam Buckle Strap W/E or a Spring Fitting	2,500/3,000 lbs.	2"	12/16/20 ft	Y/G/B
6		2in Logistic Cam Buckle Strap W/E or a 3-Piece Fitting	2,500/3,000 lbs.	2"	12/16/20 ft	Y/G/B

WEBBING WINCH



84671

84671

Description	Strap Width	Overal Length	Width	High	Breaking Strength
Low Profile Weld-on Webbing Winch	4.88"	7.68"	3.94"	4.33"	16,500 lbs
Standard Weld-on Webbing Winch	4.88"	7.68"	3.54"	5.51"	16,500 lbs
Standard Storable Weld-on Webbing Winch	4.88"	7.68"	3.54"	6.22"	16,500 lbs
Low Profile Portable Webbing Winch	4.88"	7.68"	3.94"	4.33"	16,500 lbs
Standard Portable Webbing Winch	4.88"	7.68"	3.54"	5.51"	16,500 lbs
Standard Storable Portable Webbing Winch	4.88"	7.68"	3.54"	6.22"	16,500 lbs
Sliding Webbing Winch	4.88"	7.68"	3.94"	5.9"	16,500 lbs
Sliding Webbing Winch	4.88"	7.68"	3.94"	6.89"	16,500 lbs
Sliding Webbing Winch	4.88"	7.68"	3.94"	7.48"	16,500 lbs
2 Inch Lashing Webbing Winch, Hexagon Head					10,000 lbs.
2 Inch Lashing Webbing Winch, Round Head					10,000 lbs.
	Low Profile Weld-on Webbing Winch Standard Weld-on Webbing Winch Standard Storable Weld-on Webbing Winch Low Profile Portable Webbing Winch Standard Portable Webbing Winch Standard Storable Portable Webbing Winch Sliding Webbing Winch Sliding Webbing Winch Sliding Webbing Winch	Low Profile Weld-on Webbing Winch4.88"Standard Weld-on Webbing Winch4.88"Standard Storable Weld-on Webbing Winch4.88"Low Profile Portable Webbing Winch4.88"Standard Portable Webbing Winch4.88"Standard Portable Webbing Winch4.88"Standard Storable Portable Webbing Winch4.88"Standard Storable Portable Webbing Winch4.88"Sliding Webbing Winch4.88"Sliding Webbing Winch4.88"Sliding Webbing Winch4.88"2 Inch Lashing Webbing Winch, Hexagon Head4.88"	DescriptionStrap WidthLengthLow Profile Weld-on Webbing Winch4.88"7.68"Standard Weld-on Webbing Winch4.88"7.68"Standard Storable Weld-on Webbing Winch4.88"7.68"Low Profile Portable Webbing Winch4.88"7.68"Standard Portable Webbing Winch4.88"7.68"Standard Portable Webbing Winch4.88"7.68"Standard Portable Webbing Winch4.88"7.68"Standard Storable Portable Webbing Winch4.88"7.68"Standard Storable Portable Webbing Winch4.88"7.68"Sliding Webbing Winch4.887.68"Sliding Webbing Winch4.887.68Sliding Webbing Winch5.85.8Sliding Webbing Winch5.85.8Sliding Webbing Winch5.85.8 <td>DescriptionStrap WidthLengthWidthLow Profile Weld-on Webbing Winch4.88"7.68"3.94"Standard Weld-on Webbing Winch4.88"7.68"3.54"Standard Storable Weld-on Webbing Winch4.88"7.68"3.54"Low Profile Portable Webbing Winch4.88"7.68"3.94"Standard Portable Webbing Winch4.88"7.68"3.94"Standard Portable Webbing Winch4.88"7.68"3.54"Standard Portable Webbing Winch4.88"7.68"3.54"Standard Storable Portable Webbing Winch4.88"7.68"3.54"Standard Storable Portable Webbing Winch4.88"7.68"3.94"Standard Storable Portable Webbing Winch4.88"7.68"3.94"Sliding Webbing Winch4.88"7.68"3.94"Sliding Webbing Winch4.88"7.68"3.94"2 Inch Lashing Webbing Winch, Hexagon Head</td> <td>DescriptionStrap WidthLengthWidthHighLow Profile Weld-on Webbing Winch4.88"7.68"3.94"4.33"Standard Weld-on Webbing Winch4.88"7.68"3.54"5.51"Standard Storable Weld-on Webbing Winch4.88"7.68"3.54"6.22"Low Profile Portable Webbing Winch4.88"7.68"3.94"4.33"Standard Storable Webbing Winch4.88"7.68"3.94"4.33"Standard Portable Webbing Winch4.88"7.68"3.54"6.22"Standard Portable Webbing Winch4.88"7.68"3.54"6.22"Standard Storable Portable Webbing Winch4.88"7.68"3.94"6.22"Standard Storable Portable Webbing Winch4.88"7.68"3.94"6.89"Stiding Webbing Winch4.88"7.68"3.94"6.89"Sliding Webbing Winch4.88"7.68"3.94"7.48"Lock Lashing Webbing Winch4.88"7.68"3.94"7.48"</td>	DescriptionStrap WidthLengthWidthLow Profile Weld-on Webbing Winch4.88"7.68"3.94"Standard Weld-on Webbing Winch4.88"7.68"3.54"Standard Storable Weld-on Webbing Winch4.88"7.68"3.54"Low Profile Portable Webbing Winch4.88"7.68"3.94"Standard Portable Webbing Winch4.88"7.68"3.94"Standard Portable Webbing Winch4.88"7.68"3.54"Standard Portable Webbing Winch4.88"7.68"3.54"Standard Storable Portable Webbing Winch4.88"7.68"3.54"Standard Storable Portable Webbing Winch4.88"7.68"3.94"Standard Storable Portable Webbing Winch4.88"7.68"3.94"Sliding Webbing Winch4.88"7.68"3.94"Sliding Webbing Winch4.88"7.68"3.94"2 Inch Lashing Webbing Winch, Hexagon Head	DescriptionStrap WidthLengthWidthHighLow Profile Weld-on Webbing Winch4.88"7.68"3.94"4.33"Standard Weld-on Webbing Winch4.88"7.68"3.54"5.51"Standard Storable Weld-on Webbing Winch4.88"7.68"3.54"6.22"Low Profile Portable Webbing Winch4.88"7.68"3.94"4.33"Standard Storable Webbing Winch4.88"7.68"3.94"4.33"Standard Portable Webbing Winch4.88"7.68"3.54"6.22"Standard Portable Webbing Winch4.88"7.68"3.54"6.22"Standard Storable Portable Webbing Winch4.88"7.68"3.94"6.22"Standard Storable Portable Webbing Winch4.88"7.68"3.94"6.89"Stiding Webbing Winch4.88"7.68"3.94"6.89"Sliding Webbing Winch4.88"7.68"3.94"7.48"Lock Lashing Webbing Winch4.88"7.68"3.94"7.48"



- **BIKE** RACK
 - •Easy to fit and remove,
 - Support strap included



P/N	Description	Mount Style	Finish	NOTE
84450	3-bike bike rack	Trunk mounted	Black powder coat	Fits most cars, vans and SUVs.
84451	2-kike bike rack	Trunk mounted	Black powder coat	Fits most cars,vans and SUVs.



84455

P/N	Description	Description Mount Style		Shank Size
84454	4-bike bike rack	Trunk mounted	Black powder coat	1 1/4" & 2"
84455	2-bike bike rack	Trunk mounted	Black powder coat	2"



CARGO CARRIERS

•Attactive, full-color reail packaging

Includes all necessary hardware



84481



P/N Shank Size Shank Finish Description Capacity Dimensions 48" x28"x3.25" 84481 500 lbs. 2"x2" Black Scooter carrier single fold ramp Floding 48" x28"x3.25" Scooter carrier single fold ramp 84482 500 lbs. 2"x2" Floding Silver 84483 500 lbs. 2"x2" 48" x28"x4.25" Floding Black Wheelchair Mobility Scooter Carrier 48" x28"x4.25" Wheelchair Mobility Scooter Carrier 84484 500 lbs. 2"x2" Silver Floding

BASKET STYLE CARGO CARRIERS

Heavy duty,tubular,steel construction

•6" tall sides for added security



84487



P/N	Capacity	Shank Size	Dimensions	Shank	Finish	Description
84486	500 lbs.	2"x2"	60"x20"x6"	Fixed	Black	Bolt-together basket carrier
83487	500 lbs.	2"x2"	60"x20"x6"	Folding	Black	Bolt-together basket carrier
83488	500 lbs.	2"x2"	60"x24"x6"	Fixed	Black	Bolt-together basket carrier
83489	500 lbs.	2"x2"	60"x24"x6"	Folding	Black	Bolt-together basket carrier